

Description

- 0-10 metre sensing range
- 4 to 384 channels (parallel beams)
- 10 to 1150 cross scanning beams
- Active length of 65 mm to 1920 mm
- Housing length of 160 mm to 1980 mm
- Plug connection
- Automatic sensitivity adjustment
- Parallel or cross beam scan mode
- Configurable blanking function
- 33x36 mm aluminium housing with T-slot mounting
- High tolerance to hostile environments
- IO-Link communication interface
- 5 pin, IO-Link / push-pull output
- PC software for parameter configuration and diagnostics with optional USB-IO-Link Master 02



The SS 01-IO series is an advanced industrial light curtain system which consists of a self-contained transmitter SST and receiver SSR, which are to be positioned opposite of each other. The light curtains are housed in a sturdy aluminium profile (33 x 36 mm) with T-slot mounting rail, available in lengths ranging from 160 mm to 1980 mm.

The SS 01-IO series is equipped with an IO-Link communication interface which allows a variety of process parameter and setting to be configured and monitored, which includes: long or short range, light or dark selection, parallel or cross scanning beams, hole detection, smoothing (pre-filtering) function, on/off time delay, one-shot timer, blanking function. The series allows each beam to be individually monitored, which may be used for a wide range of geometrical analysis functions.

The test input in the SST may be used for either disabling or enabling the transmitting power temporarily for test purposes.

The advanced automatic sensitivity adjustment ensures that no onsite set up or adjustments are required. The signal level of each individual channel is adjusted automatically, which compensates for misalignment and contamination during operation. The transmitter and receiver are electrically synchronised by wire connection. The system is intended for static applications.

Both the transmitter and receiver units are protected against reverse polarity of power supplies, test input and output signals. The output is also protected against short circuit and inductive loads.

Technical Data						
	SST			SSR		
Supply voltage	12-30 V dc					
Current consumption	100 mA			50 mA		
Output (Q _i)	–			Push / Pull		
Output rating	–			100 mA		
Short circuit protected	–			Yes		
Reverse polarity protected	–			Yes		
Light source	Infrared (880 nm)			–		
Channel spacing	5 mm	10 mm	20 mm	5 mm	10 mm	20 mm
Number of channels (diodes per detector)	16 ... 384	8 ... 192	4 ... 96	16 ... 384	8 ... 192	4 ... 96
Number of beams	Parallel	16 ... 384	8 ... 192	4 ... 96	16 ... 384	4 ... 96
	Cross	46 ... 1150	22 ... 574	10 ... 286	46 ... 1150	22 ... 574
Active length	65 ... 1920 mm					
Housing length	160 ... 1980 mm					
Max. response time	Parallel / Cross	–		(N x 120 µs) + 2 ms		
	Parallel	–		6,6 ... 48,1 ms	6,6 ... 25,0 ms	6,6 ... 13,5 ms
	Cross	–		6,6 ... 140,0 ms	6,6 ... 70,9 ms	6,6 ... 36,3 ms
Power on indicator	Green LED					
Output indicator	–			Yellow LED		
System status indicator	–			Red LED		
Blanking function	–			Configurable		
Housing dimensions (w x d)	33 x 36 mm					
Housing material	Profile	Aluminium (black anodised)				
	Lens cover	CoPET				
Connection Cable, PVC Ø 5,9 mm	0,5 m cable with 5 pin, M12 plug			0,5 m cable with 5 pin, M12 plug		

Note: "N" is equal to the number of beams (parallel or crossed).

Environmental Data

	SST	SSR
Vibration	10-55 Hz, 0,5 mm	
Shock	30 g	
Light immunity @ 5° incidence	–	100 000 lux
Temperature, operation	– 30 to +60 °C	
Temperature, storage	– 40 to +80 °C	
Sealing class	IP 67	
Approvals	CE UK CA	

Available Types

	Housing Length	Active Length	Number of Channels	Number of Beams Parallel / Cross	Channel Spacing	Connection	0.5 m cable with 5 pin, M12 plug	Range
						Output	Order Reference	
Transmitter	160 mm	80 mm	16	16 / 46	5 mm	–	SST 01-10-016-016-05-H-1D1-0.5-J5	10 m
	220 mm	160 mm	32	32 / 94			SST 01-10-022-032-05-H-1D1-0.5-J5	
	300 mm	240 mm	48	48 / 142			SST 01-10-030-048-05-H-1D1-0.5-J5	
	380 mm	320 mm	64	64 / 190			SST 01-10-038-064-05-H-1D1-0.5-J5	
	460 mm	400 mm	80	80 / 238			SST 01-10-046-080-05-H-1D1-0.5-J5	
	540 mm	480 mm	96	96 / 286			SST 01-10-054-096-05-H-1D1-0.5-J5	
	620 mm	560 mm	112	112 / 334			SST 01-10-062-112-05-H-1D1-0.5-J5	
	700 mm	640 mm	128	128 / 382			SST 01-10-070-128-05-H-1D1-0.5-J5	
	860 mm	800 mm	160	160 / 478			SST 01-10-086-160-05-H-1D1-0.5-J5	
	1020 mm	960 mm	192	192 / 574			SST 01-10-102-192-05-H-1D1-0.5-J5	
	1180 mm	1120 mm	224	224 / 670			SST 01-10-118-224-05-H-1D1-0.5-J5	
	1340 mm	1280 mm	256	256 / 766			SST 01-10-134-256-05-H-1D1-0.5-J5	
	1500 mm	1440 mm	288	288 / 862			SST 01-10-150-288-05-H-1D1-0.5-J5	
	1660 mm	1600 mm	320	320 / 958			SST 01-10-166-320-05-H-1D1-0.5-J5	
	1820 mm	1760 mm	352	352 / 1054			SST 01-10-182-352-05-H-1D1-0.5-J5	
	1980 mm	1920 mm	384	384 / 1150			SST 01-10-198-384-05-H-1D1-0.5-J5	
	160 mm	75 mm	8	8 / 22	10 mm	–	SST 01-10-016-008-10-H-1D1-0.5-J5	
	220 mm	155 mm	16	16 / 46			SST 01-10-022-016-10-H-1D1-0.5-J5	
	300 mm	235 mm	24	24 / 70			SST 01-10-030-024-10-H-1D1-0.5-J5	
	380 mm	315 mm	32	32 / 94			SST 01-10-038-032-10-H-1D1-0.5-J5	
	460 mm	395 mm	40	40 / 118			SST 01-10-046-040-10-H-1D1-0.5-J5	
	540 mm	475 mm	48	48 / 142			SST 01-10-054-048-10-H-1D1-0.5-J5	
	620 mm	555 mm	56	56 / 166			SST 01-10-062-056-10-H-1D1-0.5-J5	
	700 mm	635 mm	64	64 / 190			SST 01-10-070-064-10-H-1D1-0.5-J5	
	860 mm	795 mm	80	80 / 238			SST 01-10-086-080-10-H-1D1-0.5-J5	
	1020 mm	955 mm	96	96 / 286			SST 01-10-102-096-10-H-1D1-0.5-J5	
	1180 mm	1115 mm	112	112 / 334			SST 01-10-118-112-10-H-1D1-0.5-J5	
	1340 mm	1275 mm	128	128 / 382			SST 01-10-134-128-10-H-1D1-0.5-J5	
	1500 mm	1435 mm	144	144 / 430			SST 01-10-150-144-10-H-1D1-0.5-J5	
	1660 mm	1595 mm	160	160 / 478			SST 01-10-166-160-10-H-1D1-0.5-J5	
	1820 mm	1755 mm	176	176 / 526			SST 01-10-182-176-10-H-1D1-0.5-J5	
	1980 mm	1915 mm	192	192 / 574			SST 01-10-198-192-10-H-1D1-0.5-J5	
	160 mm	65 mm	4	4 / 10	20 mm	–	SST 01-10-016-004-20-H-1D1-0.5-J5	
	220 mm	145 mm	8	8 / 22			SST 01-10-022-008-20-H-1D1-0.5-J5	
	300 mm	225 mm	12	12 / 34			SST 01-10-030-012-20-H-1D1-0.5-J5	
	380 mm	305 mm	16	16 / 46			SST 01-10-038-016-20-H-1D1-0.5-J5	
	460 mm	385 mm	20	20 / 58			SST 01-10-046-020-20-H-1D1-0.5-J5	
	540 mm	465 mm	24	24 / 70			SST 01-10-054-024-20-H-1D1-0.5-J5	
	620 mm	545 mm	28	28 / 82			SST 01-10-062-028-20-H-1D1-0.5-J5	
	700 mm	625 mm	32	32 / 94			SST 01-10-070-032-20-H-1D1-0.5-J5	
	860 mm	785 mm	40	40 / 118			SST 01-10-086-040-20-H-1D1-0.5-J5	
	1020 mm	945 mm	48	48 / 142			SST 01-10-102-048-20-H-1D1-0.5-J5	
	1180 mm	1105 mm	56	56 / 166			SST 01-10-118-056-20-H-1D1-0.5-J5	
	1340 mm	1265 mm	64	64 / 190			SST 01-10-134-064-20-H-1D1-0.5-J5	
	1500 mm	1425 mm	72	72 / 214			SST 01-10-150-072-20-H-1D1-0.5-J5	
	1660 mm	1585 mm	80	80 / 238			SST 01-10-166-080-20-H-1D1-0.5-J5	
	1820 mm	1745 mm	88	88 / 262			SST 01-10-182-088-20-H-1D1-0.5-J5	
	1980 mm	1905 mm	96	96 / 286			SST 01-10-198-096-20-H-1D1-0.5-J5	

Note: Special lengths are available upon request.

Available Types


	Housing Length	Active Length	Number of Channels	Number of Beams Parallel / Cross	Channel Spacing	Connection	0.5 m cable with 5 pin, M12 plug	Range
						Output	Order Reference	
Receiver	160 mm	80 mm	16	16 / 46	5 mm	Push / Pull	SSR 01-10-016-016-05-H-IO-0.5-J5	1-10 m
	220 mm	160 mm	32	32 / 94			SSR 01-10-022-032-05-H-IO-0.5-J5	
	300 mm	240 mm	48	48 / 142			SSR 01-10-030-048-05-H-IO-0.5-J5	
	380 mm	320 mm	64	64 / 190			SSR 01-10-038-064-05-H-IO-0.5-J5	
	460 mm	400 mm	80	80 / 238			SSR 01-10-046-080-05-H-IO-0.5-J5	
	540 mm	480 mm	96	96 / 286			SSR 01-10-054-096-05-H-IO-0.5-J5	
	620 mm	560 mm	112	112 / 334			SSR 01-10-062-112-05-H-IO-0.5-J5	
	700 mm	640 mm	128	128 / 382			SSR 01-10-070-128-05-H-IO-0.5-J5	
	860 mm	800 mm	160	160 / 478			SSR 01-10-086-160-05-H-IO-0.5-J5	
	1020 mm	960 mm	192	192 / 574			SSR 01-10-102-192-05-H-IO-0.5-J5	
	1180 mm	1120 mm	224	224 / 670			SSR 01-10-118-224-05-H-IO-0.5-J5	
	1340 mm	1280 mm	256	256 / 766			SSR 01-10-134-256-05-H-IO-0.5-J5	
	1500 mm	1440 mm	288	288 / 862			SSR 01-10-150-288-05-H-IO-0.5-J5	
	1660 mm	1600 mm	320	320 / 958			SSR 01-10-166-320-05-H-IO-0.5-J5	
	1820 mm	1760 mm	352	352 / 1054			SSR 01-10-182-352-05-H-IO-0.5-J5	
	1980 mm	1920 mm	384	384 / 1150			SSR 01-10-198-384-05-H-IO-0.5-J5	
	160 mm	75 mm	8	8 / 22	10 mm	Push / Pull	SSR 01-10-016-008-10-H-IO-0.5-J5	
	220 mm	155 mm	16	16 / 46			SSR 01-10-022-016-10-H-IO-0.5-J5	
	300 mm	235 mm	24	24 / 70			SSR 01-10-030-024-10-H-IO-0.5-J5	
	380 mm	315 mm	32	32 / 94			SSR 01-10-038-032-10-H-IO-0.5-J5	
	460 mm	395 mm	40	40 / 118			SSR 01-10-046-040-10-H-IO-0.5-J5	
	540 mm	475 mm	48	48 / 142			SSR 01-10-054-048-10-H-IO-0.5-J5	
	620 mm	555 mm	56	56 / 166			SSR 01-10-062-056-10-H-IO-0.5-J5	
	700 mm	635 mm	64	64 / 190			SSR 01-10-070-064-10-H-IO-0.5-J5	
	860 mm	795 mm	80	80 / 238			SSR 01-10-086-080-10-H-IO-0.5-J5	
	1020 mm	955 mm	96	96 / 286			SSR 01-10-102-096-10-H-IO-0.5-J5	
	1180 mm	1115 mm	112	112 / 334			SSR 01-10-118-112-10-H-IO-0.5-J5	
	1340 mm	1275 mm	128	128 / 382			SSR 01-10-134-128-10-H-IO-0.5-J5	
	1500 mm	1435 mm	144	144 / 430			SSR 01-10-150-144-10-H-IO-0.5-J5	
	1660 mm	1595 mm	160	160 / 478			SSR 01-10-166-160-10-H-IO-0.5-J5	
	1820 mm	1755 mm	176	176 / 526			SSR 01-10-182-176-10-H-IO-0.5-J5	
	1980 mm	1915 mm	192	192 / 574			SSR 01-10-198-192-10-H-IO-0.5-J5	
	160 mm	65 mm	4	4 / 10	20 mm	Push / Pull	SSR 01-10-016-004-20-H-IO-0.5-J5	
	220 mm	145 mm	8	8 / 22			SSR 01-10-022-008-20-H-IO-0.5-J5	
	300 mm	225 mm	12	12 / 34			SSR 01-10-030-012-20-H-IO-0.5-J5	
	380 mm	305 mm	16	16 / 46			SSR 01-10-038-016-20-H-IO-0.5-J5	
	460 mm	385 mm	20	20 / 58			SSR 01-10-046-020-20-H-IO-0.5-J5	
	540 mm	465 mm	24	24 / 70			SSR 01-10-054-024-20-H-IO-0.5-J5	
	620 mm	545 mm	28	28 / 82			SSR 01-10-062-028-20-H-IO-0.5-J5	
	700 mm	625 mm	32	32 / 94			SSR 01-10-070-032-20-H-IO-0.5-J5	
	860 mm	785 mm	40	40 / 118			SSR 01-10-086-040-20-H-IO-0.5-J5	
	1020 mm	945 mm	48	48 / 142			SSR 01-10-102-048-20-H-IO-0.5-J5	
	1180 mm	1105 mm	56	56 / 166			SSR 01-10-118-056-20-H-IO-0.5-J5	
	1340 mm	1265 mm	64	64 / 190			SSR 01-10-134-064-20-H-IO-0.5-J5	
	1500 mm	1425 mm	72	72 / 214			SSR 01-10-150-072-20-H-IO-0.5-J5	
	1660 mm	1585 mm	80	80 / 238			SSR 01-10-166-080-20-H-IO-0.5-J5	
	1820 mm	1745 mm	88	88 / 262			SSR 01-10-182-088-20-H-IO-0.5-J5	
	1980 mm	1905 mm	96	96 / 286			SSR 01-10-198-096-20-H-IO-0.5-J5	

Note: Special lengths are available upon request.


Connections

	M12 Plug / Cable	
	SST	SSR
Supply +	Pin 1 / Brown	Pin 1 / Brown
Supply -	Pin 3 / Blue	Pin 3 / Blue
Common sync 1	Pin 2 / White	Pin 2 / White
Common sync 2	Pin 5 / Grey	Pin 5 / Grey
Test input	Pin 4 / Black	-
IO-Link	-	Pin 4 / Black





5 pin, M12

Sensor Plug
(Male)Cable Plug
(Female)

Wiring Diagrams

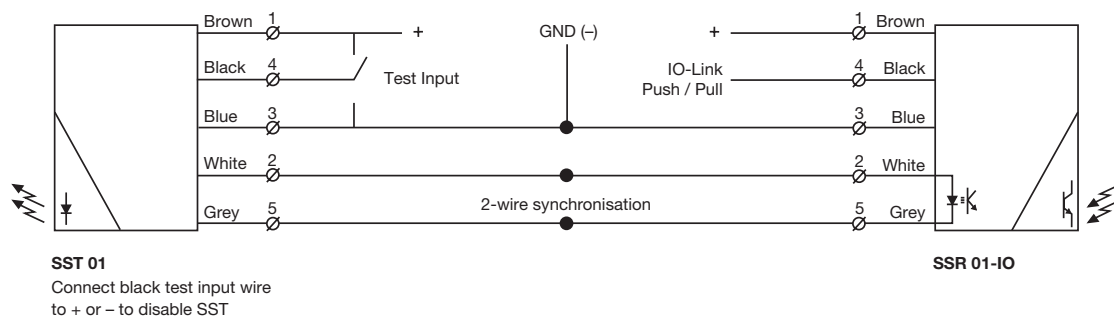


Dimensions and Descriptions

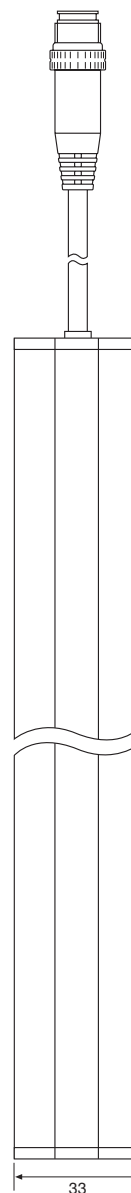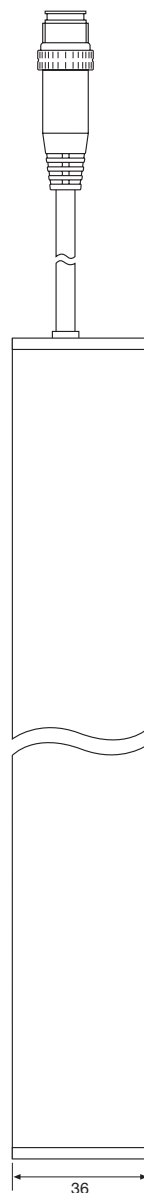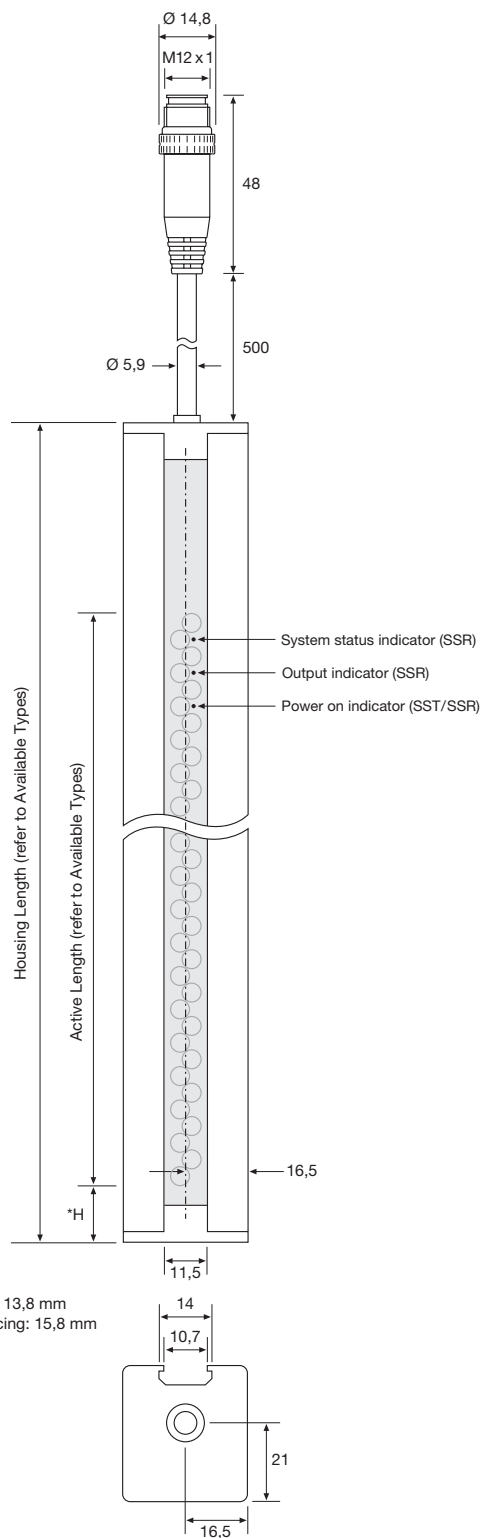


T-Slot Mounting Fixture
Stainless Steel AISI 304
(2 units included)

(Units in mm)

Beam Patterns

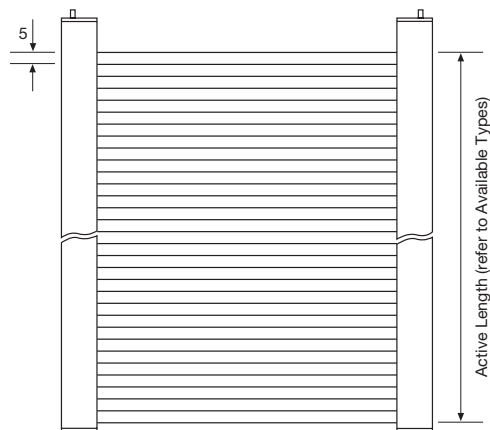


Parallel Beams

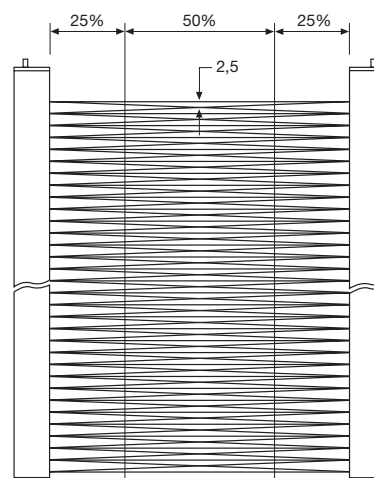


Cross Beams

5 mm channel spacing

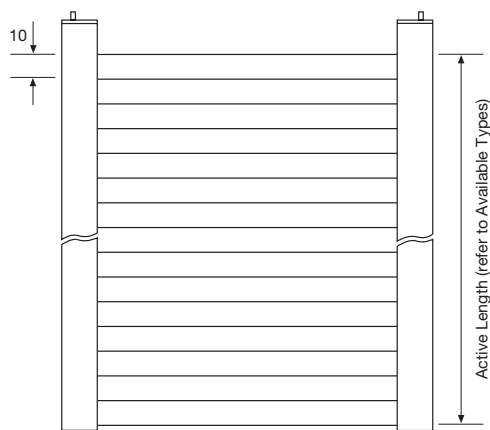


Parallel Beams

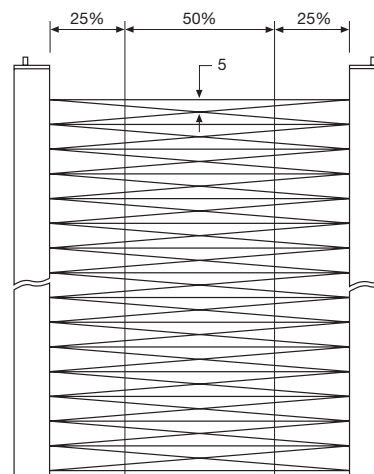


Cross Beams

10 mm channel spacing

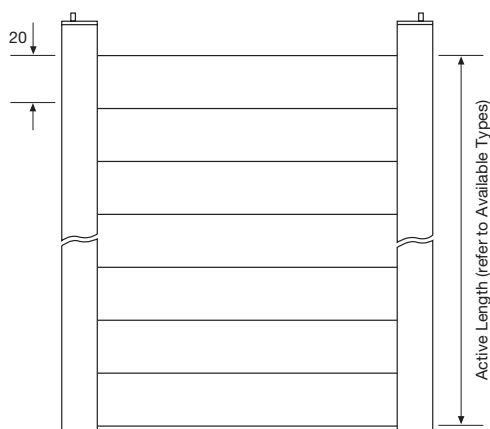

Parallel Beams

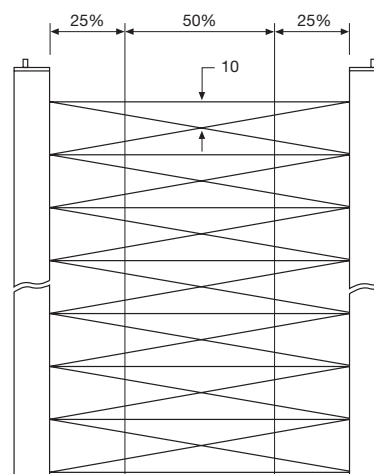


Cross Beams

20 mm channel spacing

(Units in mm)


Sensing Characteristics

Parallel Displacement

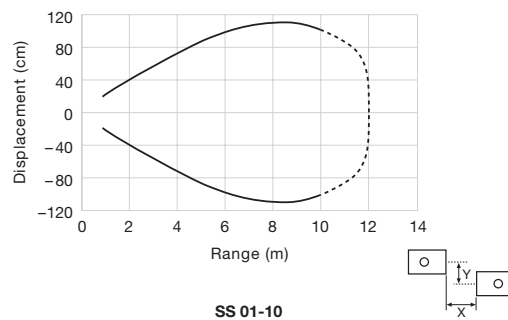

SS 01-10

Mounting Bracket

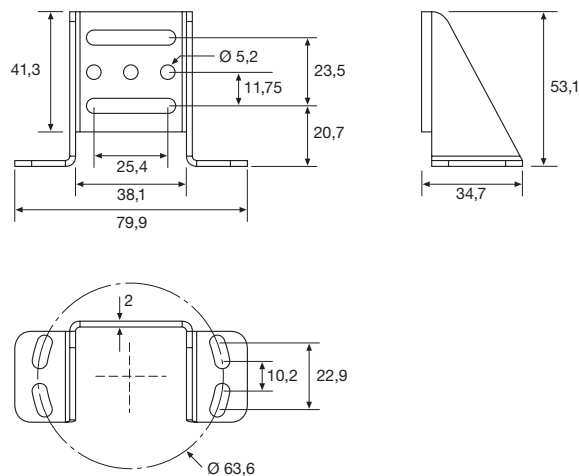

TR SS53-80 LU
Stainless Steel AISI 304
(to be ordered separately)


(Units in mm)

SpaceScan PC Programming and Monitoring

General Setup

	Name	Description	Value Range
1	Range	Select short (low excess gain) or long range (high excess gain)	Short / Long
2	Scan Model	Select scan mode	Parallel / Crossed beam scanning
3	Hole Detection	Invert the status of all beams	True / False

USB-IO Link Master 02 PC Software Screenshot

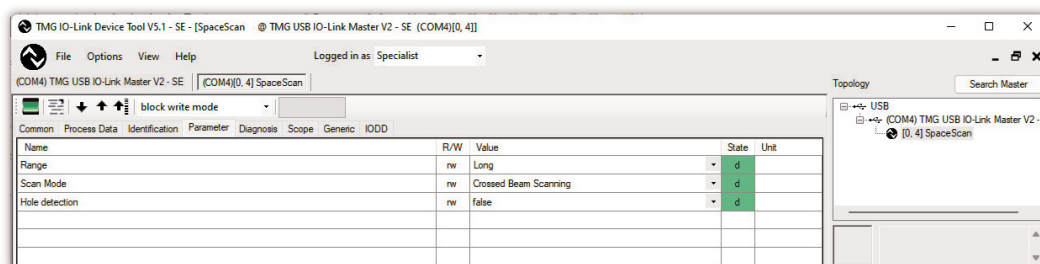

SpaceScan PC Programming and Monitoring


SIO / Digital Output

	Name	Description	Value Range
1	Light Operated	Select between light or dark operation	True / False
2	Minimum Size of Coherent Area	Specifies the maximum size of objects that shall be ignored	Beam number
3	On-Delay	On delay time between the expression becomes true and the output is switched	0.0 – 10.0 s
4	Off-Delay	Off delay time between the expression becomes false and the output is switched	0.0 – 10.0 s
5	One Shot Time	Select duration the output be active when switching from not active to active	0.0 – 60.0 s
6	Force Set Enable	Allows the user to set the value of the digital output	True / False
7	Forced On	Output is set to high or low	True / False

Channel 1

	Name	Description	Value Range
1	Light Operated	Select between light or dark operation	True / False
2	Minimum Size of Coherent Area	Specifies the maximum size of objects that shall be ignored	Beam number
3	On-Delay	On delay time between the expression becomes true and the output is switched	0.0 – 10.0 s
4	Off-Delay	Off delay time between the expression becomes false and the output is switched	0.0 – 10.0 s
5	One Shot Time	Select duration the output be active when switching from not active to active	0.0 – 60.0 s
6	Force Set Enable	Allows the user to set the value of the channel 1	True / False
7	Forced On	Channel 1 is set to high or low	True / False

USB-IO Link Master 02 PC Software Screenshot

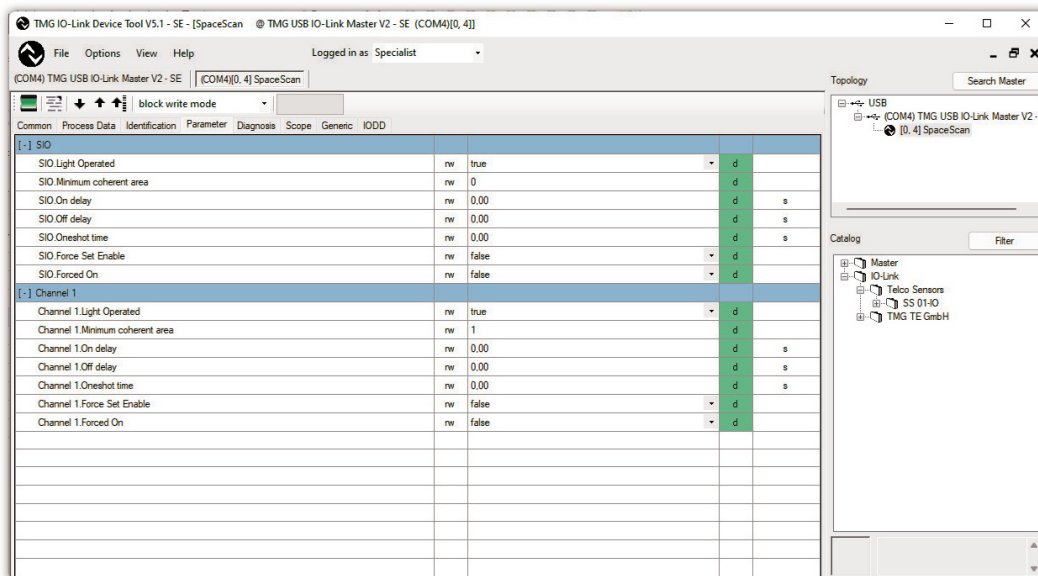


SpaceScan PC Programming and Monitoring

Blanking

	Name	Description	Value Range
1	Measure Blanking from Light Curtain	Obstructed areas are read from light curtain and written as text in blanking text box Blanked beams can be seen in values for Write Blanking to Light Curtain after upload	True (write only)
2	Blanking [1]	Blanking value for first set of 8 beams in a binary value	0 – 255 (0-8 beams blanked)
3	Blanking [2]	Blanking value for second set of 8 beams in a binary value	0 – 255 (0-8 beams blanked)
4	Blanking [3]	Blanking value for third set of 8 beams in a binary value	0 – 255 (0-8 beams blanked)
5	Blanking [4]	Blanking value for fourth set of 8 beams in a binary value	0 – 255 (0-8 beams blanked)
	...		
48	Blanking [48]	Blanking value for beam 377 to 384	0 – 255 (0-8 beams blanked)

USB-IO Link Master 02 PC Software Screenshot

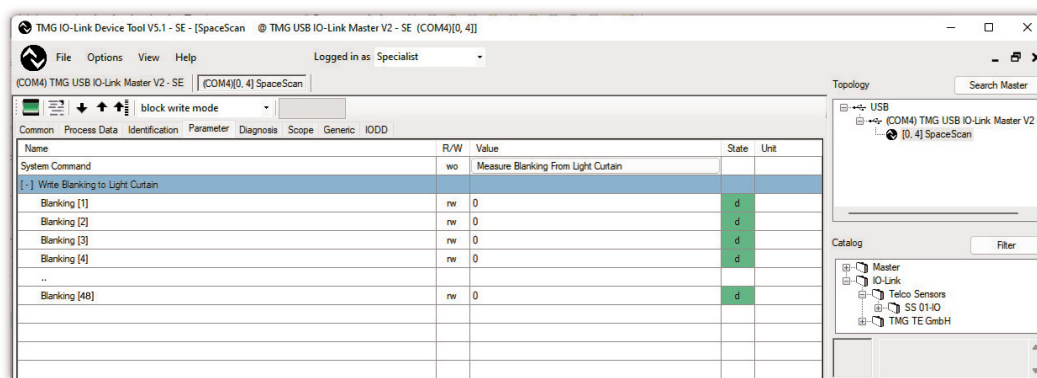


SpaceScan PC Programming and Monitoring

Process Data

	Name	Description	Value Range
1	SIO	Indicates status of SIO output	True / False
2	Channel 1	Indicates status of channel 1	True / False
3	Short Range	Indicates if short range is selected	True / False
4	Crossed Beam Scanning	Indicates if crossed beams mode is selected	True / False
5	Error	Indicates if there is an error (low voltage or synchronisation failure)	True / False
6	Contiguously Blocked Beams	Indicates the number of the maximum contiguously blocked beams	0
7	Beams 1 to 8	Value for first set of 8 beams in a binary value	0 – 255
8	Beams 9 to 16	Value for second set of 8 beams in a binary value	0 – 255
9	Beams 17 to 24	Value for third set of 8 beams in a binary value	0 – 255
...			
46	Beams 312 to 320	Value for beams 312 to 320	0 – 255

Note: 320 is the maximum number of beams that can be displayed in the Process Data tab due to IO Link limitation.

USB-IO Link Master 02 PC Software Screenshot

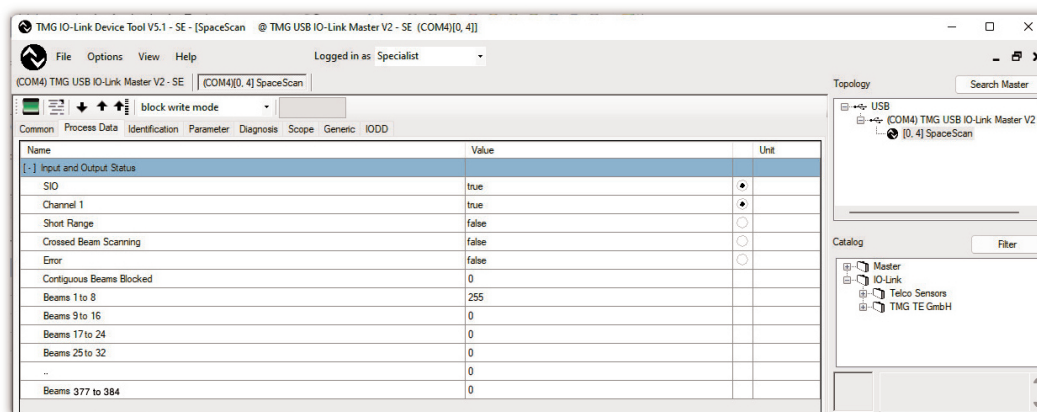

Telco reserves the right to change specifications without notice.